

Round duct diffusers

■ Round Duct Diffuser SKD-13

Application

Round duct diffusers SKD-13 are designed for supplying air to the rooms with large floor to ceiling heights, e.g. conference halls, gyms, industrial halls etc. They can be installed at any location within the duct network, which renders them suitable for supplying of either hot or cold air.

The T register model is designed to control the supply air flow-rate at the individual diffuser level. The T register design is recommended for installations with several round duct diffusers in one line. In such cases, the flow-rates of the diffusers near the line beginning should be slightly reduced, in order to supply adequate amounts of air to the diffusers farther along the line.


- St
- RAL 9010
- ▲



Description


The duct diffuser consists of galvanised round cross-section tubes with inserted longitudinal guides, fitting tight into the tubes. Cylindrical deflectors made of recycled plastics are inserted into the guides, to allow continuous adjustment of discharged air direction within the 360° range. Diffusers are available with different number of slots. The tube is painted in a RAL 9010 scale colour, or, on special orders, in other colours. The deflectors, equal to those of LD-13 slot diffusers, are white or black as standard.

A T register, made of galvanised sheet steel, is inserted in the SKD-13D/T. The T register setting piece is adjusted with a gear moved using a straight screwdriver. The gear can be accessed through a hole in the cover.

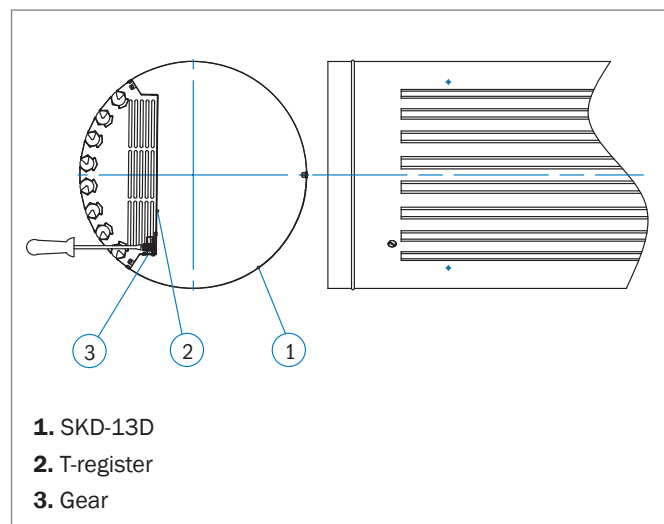


| L_0 | L | L_v |
|-------|------|---------|
| / | 1000 | 800 |
| 1505 | 750 | 2 x 500 |
| 1755 | 875 | 2 x 600 |
| 2005 | 1000 | 2 x 800 |

Diffuser structure for lengths exceeding 1000 mm

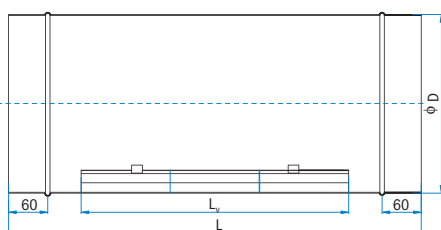


Note: ϕD is the diffuser internal diameter.

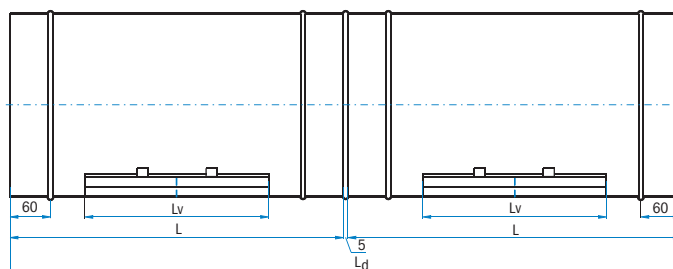


Accessories

| Size | d | L,r |
|------|---------------|-----|
| 150 | 148.7 - 149.3 | 150 |
| 160 | 158.7 - 159.3 | 160 |
| 180 | 178.6 - 179.3 | 180 |
| 200 | 198.6 - 199.3 | 200 |
| 224 | 222.5 - 223.3 | 224 |
| 250 | 248.5 - 249.3 | 250 |
| 280 | 278.4 - 279.3 | 280 |
| 300 | 298.4 - 299.3 | 300 |
| 315 | 313.4 - 314.3 | 315 |
| 355 | 353.3 - 354.3 | 355 |
| 400 | 398.3 - 399.3 | 400 |
| 450 | 448.2 - 449.3 | 450 |
| 500 | 498.2 - 499.3 | 500 |
| 560 | 558.1 - 559.3 | 560 |
| 630 | 628.1 - 629.3 | 630 |
| 710 | 708.0 - 709.3 | 710 |
| 800 | 798.1 - 799.3 | 800 |
| 900 | 897.0 - 899.3 | 900 |

Note: ϕd is the external diameter.

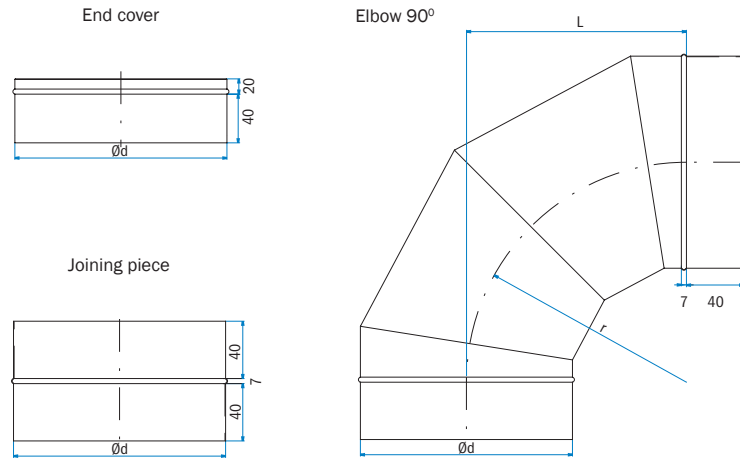


Installation of SKD-13/D

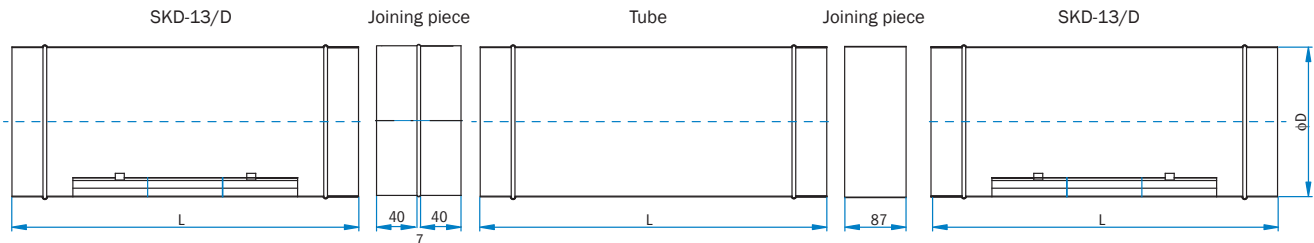


SKD-13/R

SKD-13/R is constructed for installations into round ducts with square openings.

| L | L _v | H | No. of slots | ØD of tube | Openings | |
|-----|----------------|-----|--------------|------------|----------|------|
| | | | | | L-35 | H-35 |
| 580 | 500 | 100 | 1 | 150-355 | 545 | 65 |
| 680 | 600 | 150 | 2 | 355-900 | 645 | 115 |
| 880 | 800 | 200 | 3 | 600-2400 | 845 | 165 |
| 880 | 800 | 250 | 4 | 600-2400 | 845 | 215 |

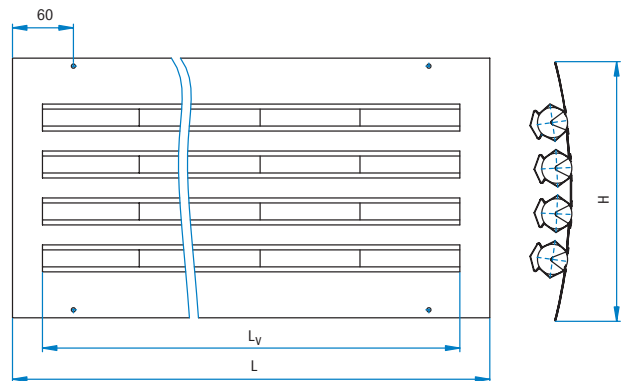

Installation of SKD-13/R:

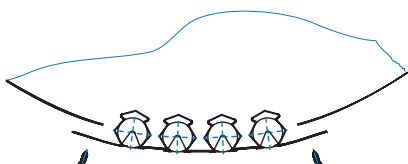

Ordering key
SKD-13D

SKD-13D / B / T / ϕ 355 / 2 L=1000 mm

Length
Number of slots
Tube diameter
T-register
B Black deflectors
W White deflectors
Tube

Note:

- Please specify the deflector colour in your order. Other colours on customer's request.

Ordering key
SKD-13R


SKD-13R / B / T / ϕ 355 / 2 L=680 mm, H=150 mm

Length
Number of slots
Tube diameter
T-register
B Black deflectors
W White deflectors
R Diffuser designed for installation into round ducts


Example accessory specification:

Accessory: Elbow 900
Colour: RAL 9010
Quantity: 1 piece


Types of discharge




Cooling - two-sided horizontal discharge




Cooling - alternate sided horizontal discharge



Cooling - one sided left (horizontal)



Cooling - one sided - right (horizontal)

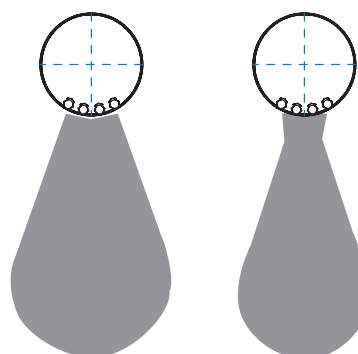

Heating - vertical 90°


For determination of air velocity data at different throw distances and temperature differences, please use software for air distribution elements calculation KLIMA ADE.

| Pipe length L_1 [mm] (Slot length L_s [mm]) | No. of slots | L_{wa} [dB(a)] | Recommended air flow volume [m ³ /h] | | | | | |
|--|--------------|------------------|---|---------------|--------------------|----------|----------|--------------------|
| | | | 150, 160, 180 | 200, 224, 250 | 280, 300, 315, 355 | 400, 450 | 500, 560 | 630, 710, 800, 900 |
| 1000 (800) | 2 | 26 | 128 | 128 | 128 | 128 | 128 | 128 |
| | 4 | 30 | 256 | 256 | 256 | 256 | 256 | 256 |
| | 6 | 34 | | | 384 | 384 | 384 | 384 |
| | 8 | 35 | | | | 512 | 512 | 512 |
| | 10 | 36 | | | | 640 | 640 | 640 |
| | 12 | 37 | | | | | 768 | 768 |
| | 14 | 38 | | | | | 896 | 896 |
| 1505 (2 x 500) | 2 | 35 | 160 | 160 | 160 | 160 | 160 | 160 |
| | 4 | 38 | 320 | 320 | 320 | 320 | 320 | 320 |
| | 6 | 40 | | | 480 | 480 | 480 | 480 |
| | 8 | 41 | | | | 640 | 640 | 640 |
| | 10 | 46 | | | | 800 | 800 | 800 |
| | 12 | 46 | | | | | 960 | 960 |
| | 14 | 47 | | | | | | 1120 |
| 1755 (2 x 600) | 2 | 30 | | 192 | 192 | 192 | | |
| | 4 | 32 | | 384 | 384 | 384 | | |
| | 6 | 33 | | | 576 | 576 | | |
| | 8 | 35 | | | | 768 | | |
| | 10 | 38 | | | | 960 | | |
| 2005 (2 x 800) | 2 | 30 | | 256 | 256 | 256 | | |
| | 4 | 32 | | 512 | 512 | 512 | | |
| | 6 | 34 | | | 768 | 768 | | |
| | 8 | 37 | | | | 1024 | | |
| | 10 | 40 | | | | 1280 | | |

Other dimensions are available on request.

The recommended air flow is 80 m³/h m per meter of active slot length.

Pressure drop determination diagram

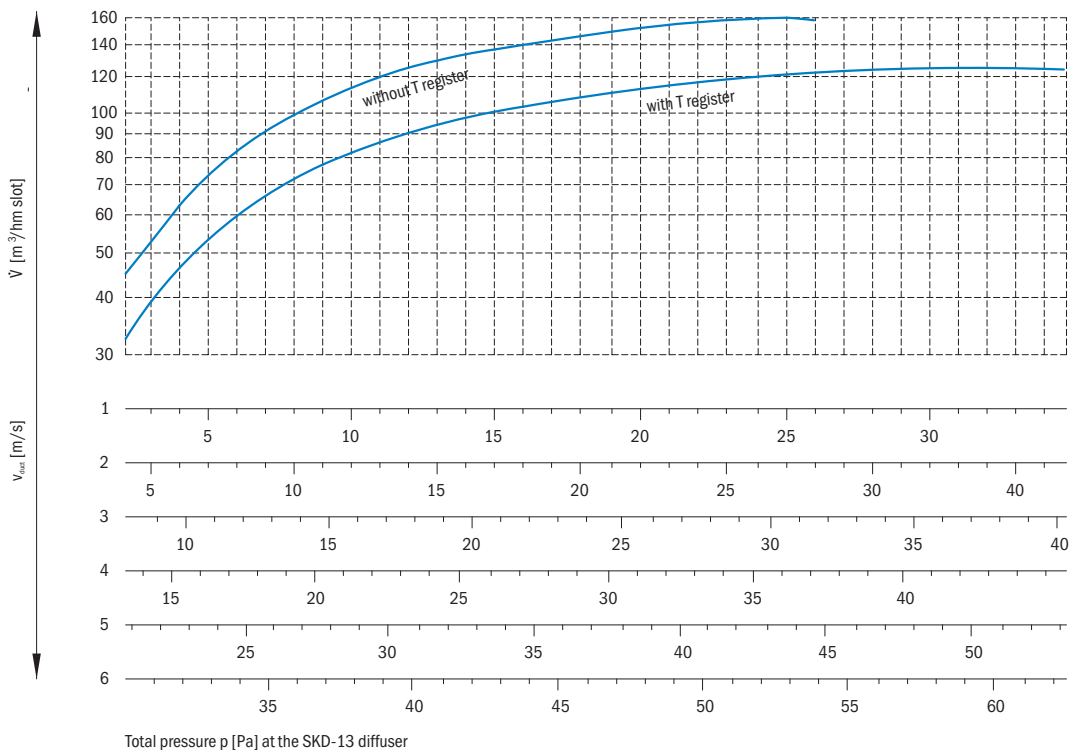

v air jet velocity in the duct