

DL-3N




Use

Throttle dampers are used to adjust the air flow rates and are adapted for installation in round and spiro duct systems.


Description



It consists of a housing and slats made of galvanized sheet metal and a mechanism on the shaft for adjusting the angle of the slats. The flaps can be externally insulated. The DL-3N has a rubber seal on the connectors.

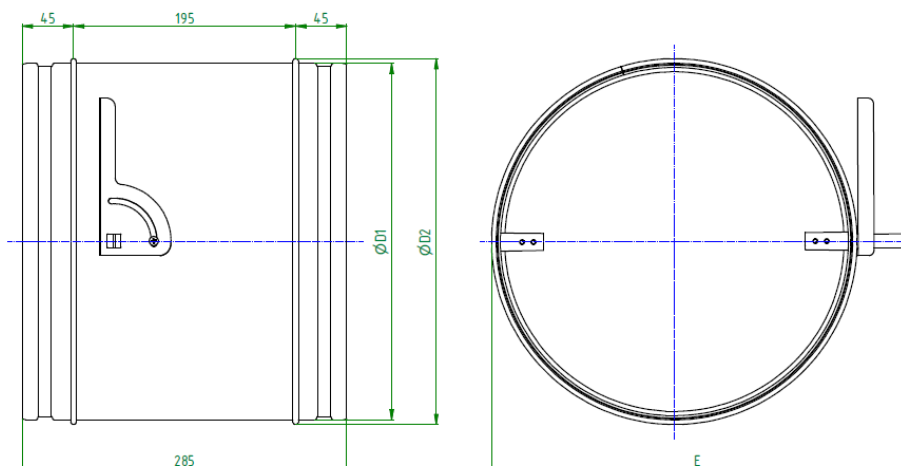




Dimenzije in velikosti



Velikost	100	125	160	200	250	315	355	400	500	630
ØD1	98	123	158	198	248	312	353	397	496	626
ØD2	104	129	164	204	254	318	358	403	502	632
E	142	167	202	242	292	356	397	441	540	670


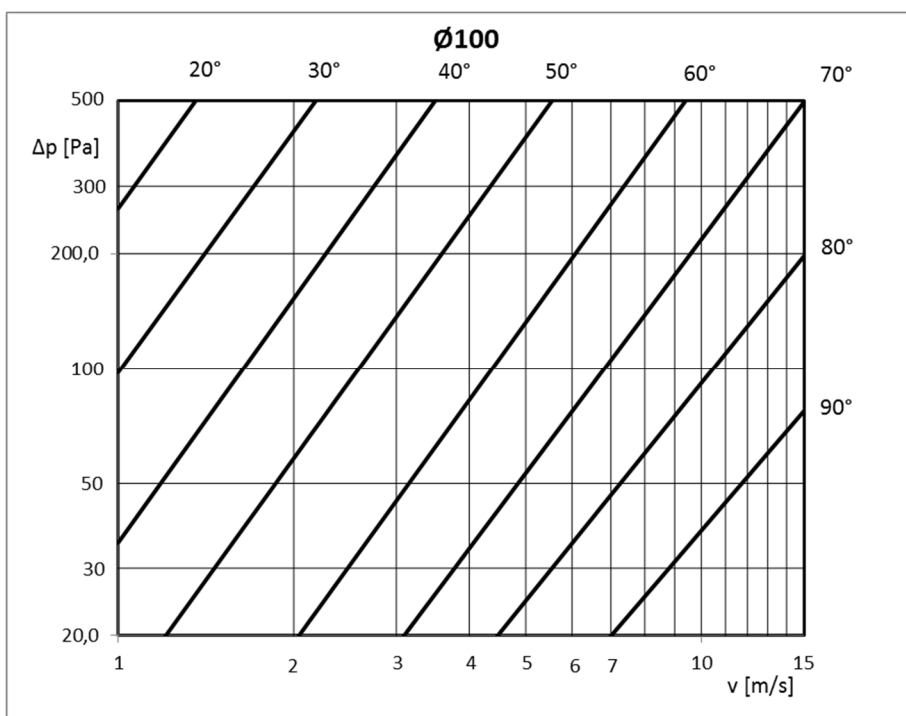


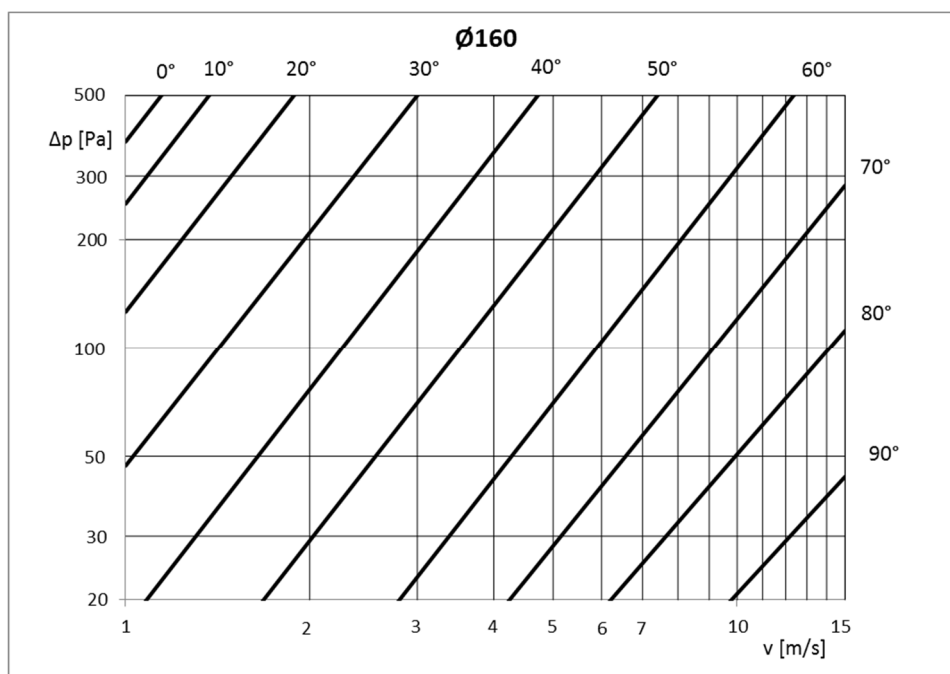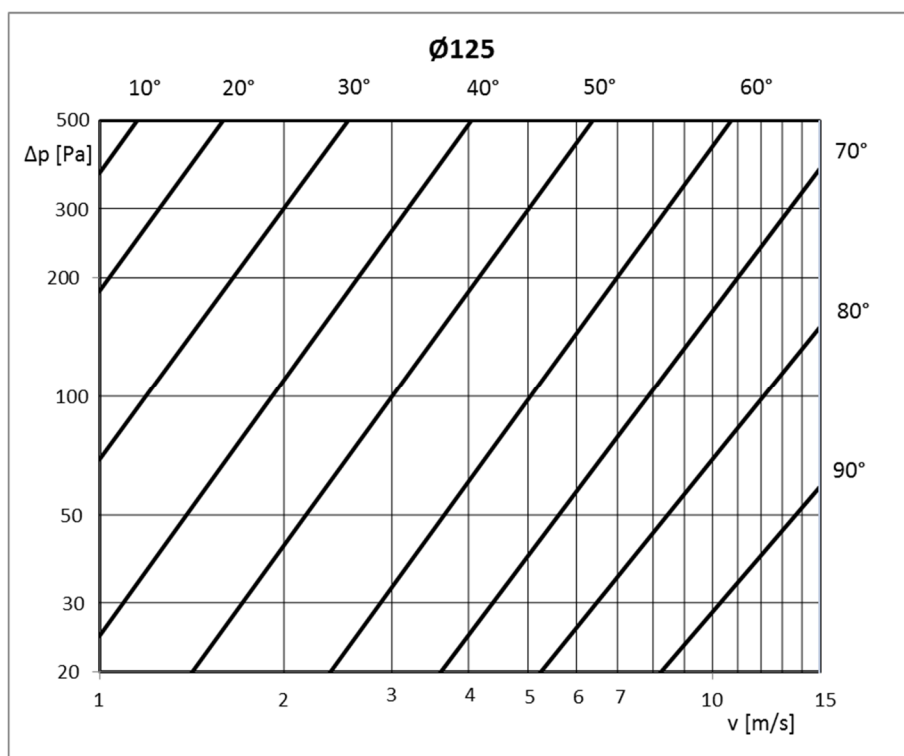

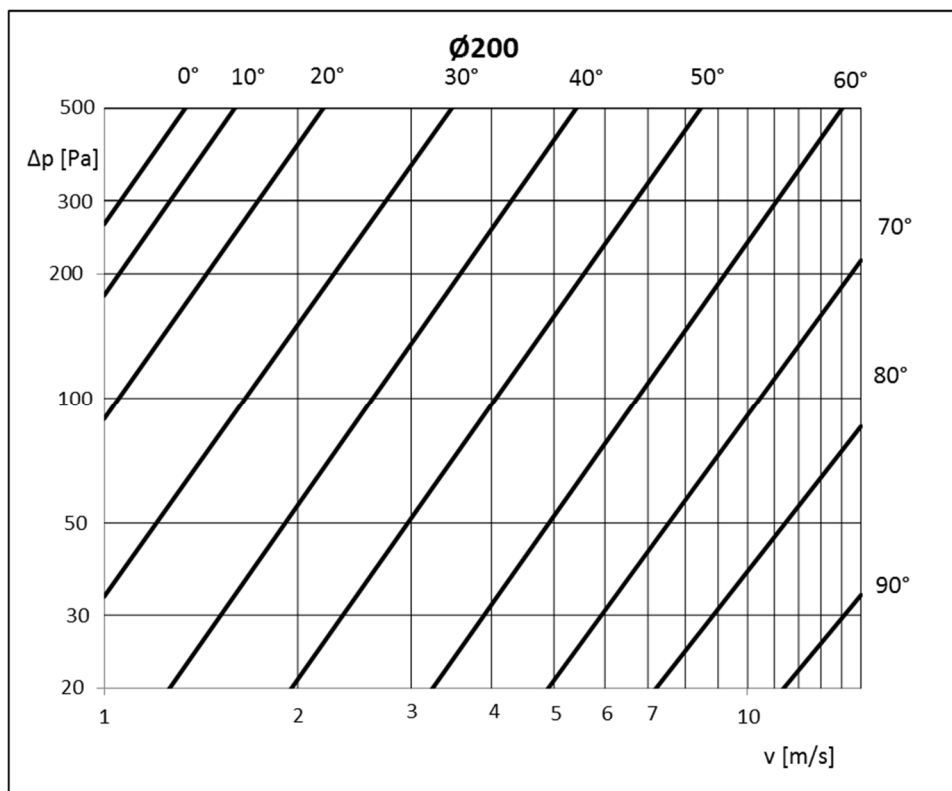

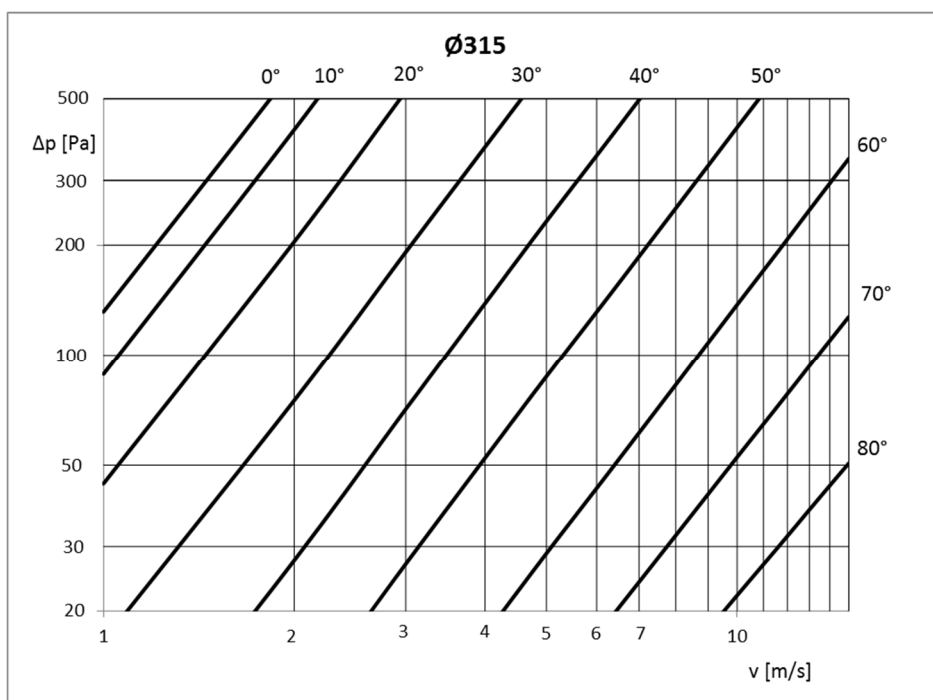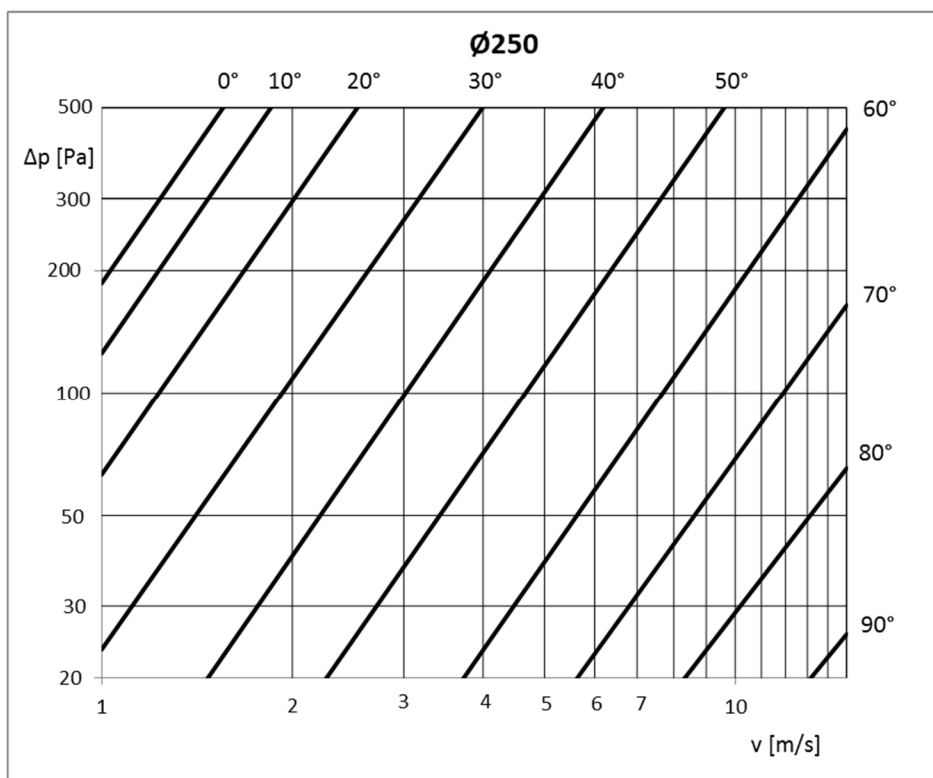

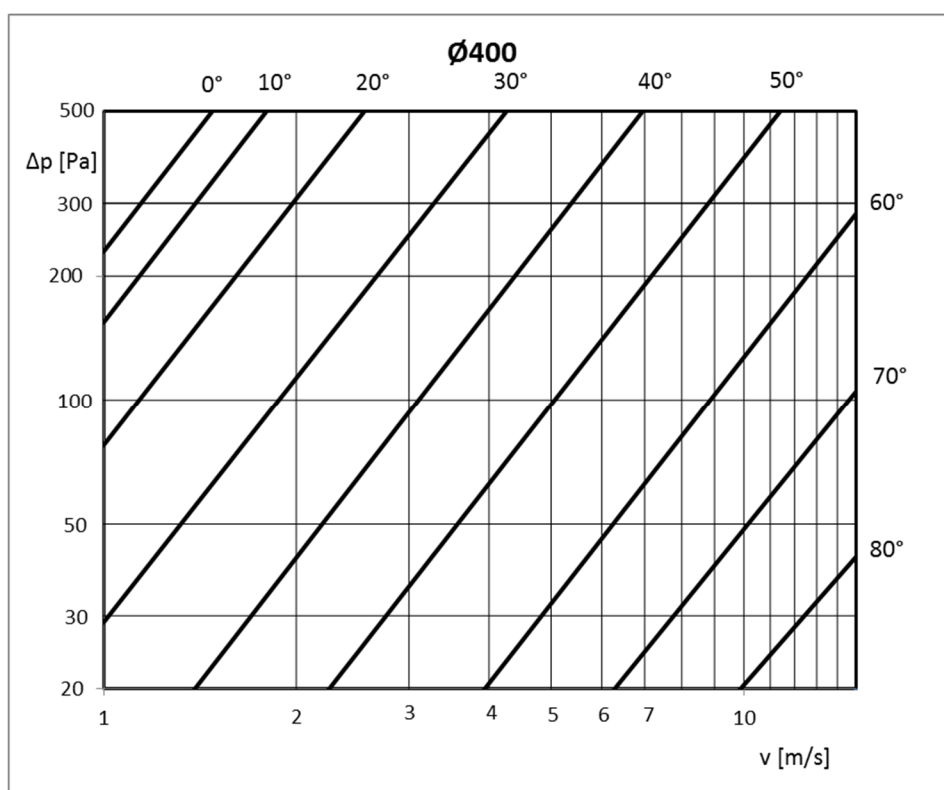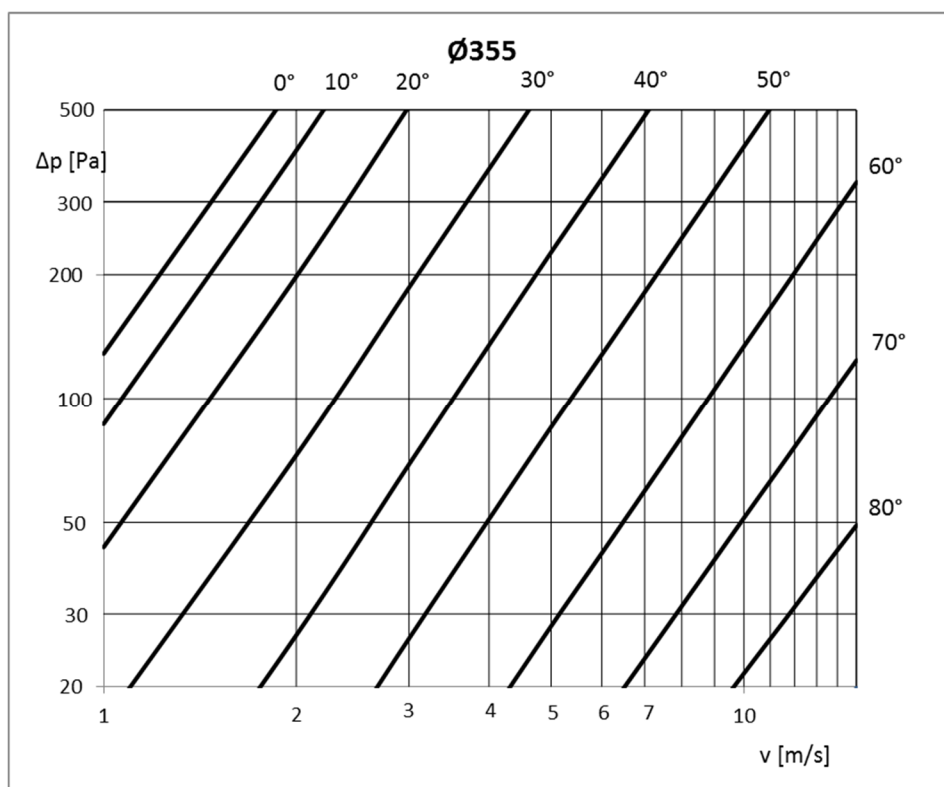

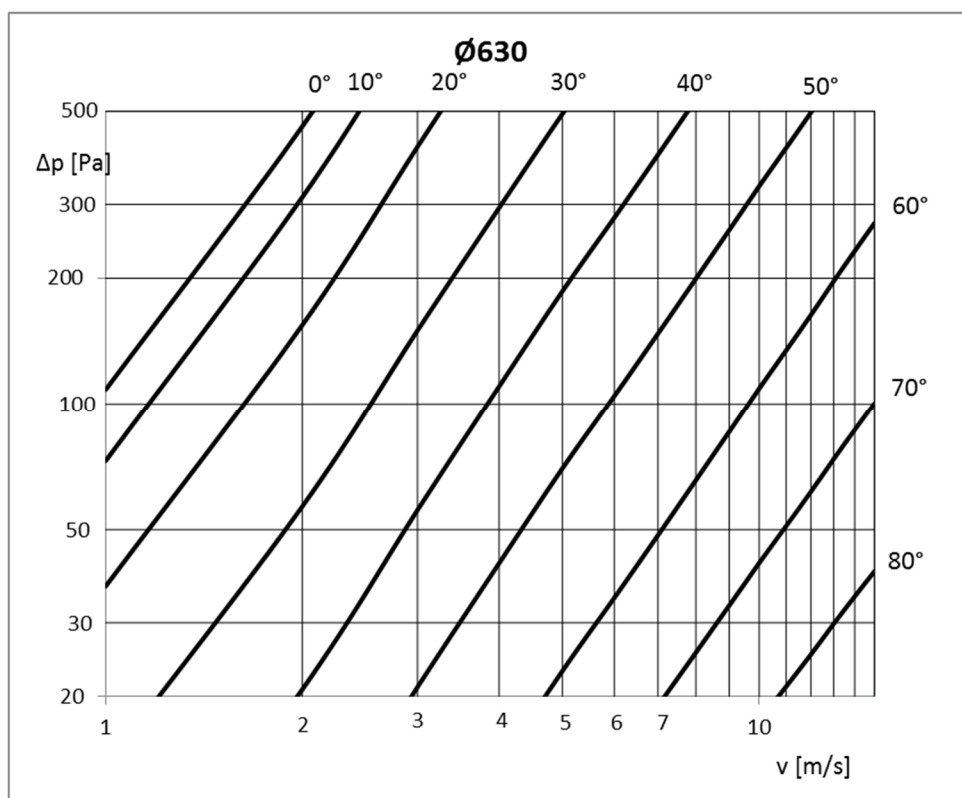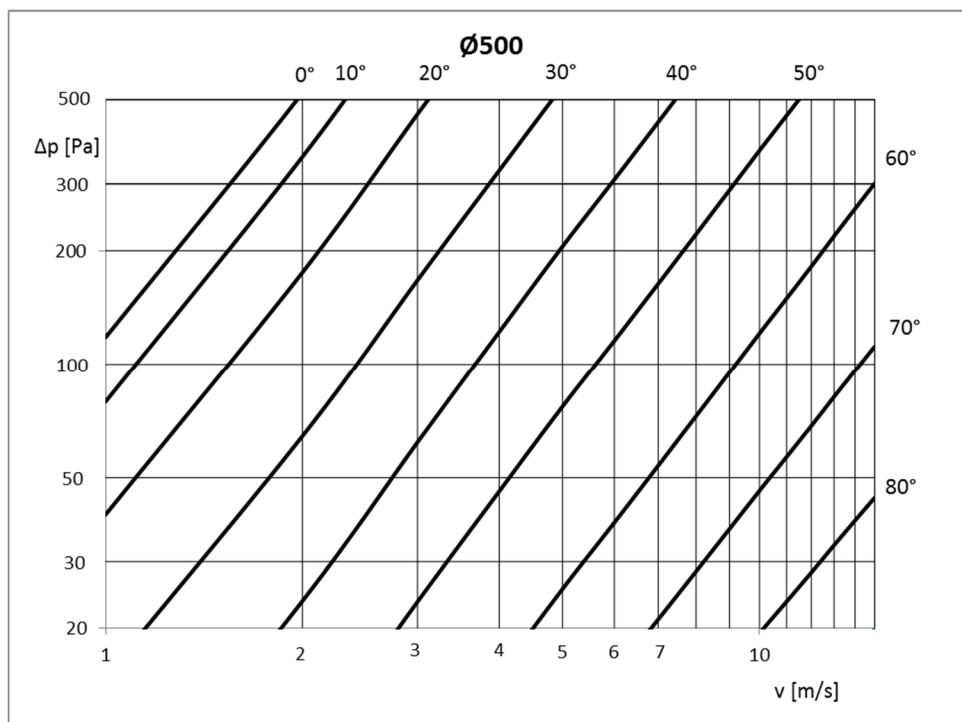

Ordering key

DL-3N / R vel. 200

└─ **R** Manual control

B1 Actuator LM 24A

B2 Actuator LM 230A

B3 Actuator LM 24A SR (continuous regulation)